

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11) EP 0 518 599 B1

(12) EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention  
of the grant of the patent:  
24.09.1997 Bulletin 1997/39

(51) Int. Cl.<sup>6</sup>: A61N 1/39

(21) Application number: 92305248.4

(22) Date of filing: 08.06.1992

(54) Implantable pacemaker/cardioverter/defibrillator device for incorporating multiple bradycardia support pacing rates

Implantierbare Vorrichtung zur Herzrhythmuskorrektur, Herzreizung und Defibrillation mit unterschiedlichen Stimulationsfrequenzen zum unterstützen von Bradykardien

Dispositif appliqué à un stimulateur cardiaque, ou défibrillateur implantable incorporant de multiples fréquences de stimulation de soutien d'une bradycardie

(84) Designated Contracting States:  
DE FR GB

• Wilson, Stephen Gordon  
Stanmore, NSW 2048 (AU)

(30) Priority: 14.06.1991 AU 6715/91

(74) Representative: Hackett, Sean James et al  
MARKS & CLERK,  
57-60 Lincoln's Inn Fields  
London WC2A 3LS (GB)

(43) Date of publication of application:  
16.12.1992 Bulletin 1992/51

(73) Proprietor: TELETRONICS N.V.  
Curaçao (AN)

(56) References cited:  
EP-A- 0 161 140 WO-A-89/01802  
US-A- 4 587 970 US-A- 4 869 252  
US-A- 4 895 151 US-A- 4 998 974

(72) Inventors:  
• Stephens, Anthony Clyde  
Willoughby, NSW 2068 (AU)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 518 599 B1

## Description

### TECHNICAL FIELD

This invention relates to implantable medical devices which deliver energy to cardiac tissue in an attempt to revert tachycardia and restore a normal sinus rhythm to a patient, and, more particularly, to those of such devices which are provided with multiple bradycardia support pacing rates.

### BACKGROUND ART

Implantable pacemaker/defibrillator devices are well known to the medical profession. One early example of such a device is U.S. Patent No. 3,857,398 to L. Rubin. The Rubin device utilizes separate circuitries in dealing with the different functions of pacing and defibrillation. There is no provision in the Rubin device for changing the bradycardia standby rate. All of Rubin's bradycardia pacing pulses are apparently delivered at the same rate. Many advances have been made after Rubin in the development of devices and techniques for providing effective medical responses to a variety of heart disorders of arrhythmias.

Recent efforts have resulted in the development of more sophisticated implantable pacing and defibrillating devices. One example of such a device is disclosed in U.S. Patent No. 4,869,252 to N. L. Gilli, entitled "Apparatus and Method for Controlling Pulse Energy in Anti-tachyarrhythmia and Bradycardia Pacing Device". This Patent discloses an apparatus which provides bradycardia support pacing at different energy levels, including a higher pulse energy for a period following successful antitachycardia therapy, and a lower level during normal bradycardia support pacing. Capture is more efficient at the higher energy level since the heart has been traumatized by the tachycardia and/or the antitachycardia therapy. In the Gilli patent, again, the bradycardia therapy is delivered at a constant programmed standby rate.

The implantable pacing and defibrillating device disclosed in U.S. Patent No. 4,940,054 to R. Grevis et al., entitled "Apparatus and Method for Controlling Multiple Sensitivities in Arrhythmia Control System Including Post Therapy Pacing Delay," is another example of a more sophisticated device of this type. Following antitachycardia therapy, which may be antitachycardia pacing or cardioversion/defibrillation, there is a pause or post therapy delay for a period of time substantially greater than a normal standby interval prior to the commencement of bradycardia support pacing. However, when bradycardia support pacing is required after antitachycardia therapy, it is delivered at a constant rate.

A problem that is common to all existing antitachyarrhythmia devices is their failure, after reverting tachycardias, to compensate patients who are dependent on bradycardia support pacing for the hemodynamic compromise resulting from the tachycardia and/or the antitachycardia therapy.

A tachycardia and/or antitachycardia therapy can temporarily reduce the heart's pumping efficiency. If so, the hemodynamic competence of a bradycardia support pacing-dependent patient being paced at a constant standby rate is impaired for as long as the pumping efficiency remains reduced. This can be traumatic to a patient and presents a real problem to some patients that are currently using existing devices.

The standby rate of normal bradycardia support pacing therapy is a programmable parameter in the antitachyarrhythmia devices disclosed in US Patents 4,869,252 and 4,940,054, referred to above, but remains at a fixed value for a particular patient for all such therapy delivered to that patient.

US Patent Specification 4587970 relates to an apparatus for treating arrhythmias of a patient's heart, comprising: bradycardia pulse therapy means for delivering bradycardia pacing pulses to the heart at a programmable standby rate; detection means for detecting the presence of a tachycardia of the heart; antitachycardia therapy means responsive to said detection means for delivering antitachycardia therapy to the heart to revert said tachycardia; and bradycardia pacing rate setting means for setting the rate of said bradycardia pacing pulses at a normal pacing rate value and setting said bradycardia pacing rate to at least one other standby rate value for bradycardia pacing after reversion of a tachycardia.

It is therefore a primary object of the present invention to provide an improved apparatus for treating cardiac arrhythmias which, following reversion from tachycardia compensate for hemodynamic compromise experienced during tachycardia and/or following antitachycardia therapy.

It is a further object of the invention to provide an improved apparatus for treating cardiac arrhythmias which delivers antitachycardia pacing therapy and cardioversion/defibrillation therapy when needed and includes temporarily increasing the bradycardia support pacing rate following the delivery of antitachycardia therapy.

Further objects and advantages of this invention will become apparent as the following description proceeds.

According to the present invention, there is provided an apparatus for treating arrhythmias of a patient's heart with the features of claim 1.

### BRIEF DESCRIPTION OF THE DRAWINGS

While the specification concludes with claims particularly pointing out and distinctly claiming the subject matter regarded as the invention herein, it is believed that the present invention will be more readily understood upon consideration of the following detailed description, taken in conjunction with the accompanying drawings, in which:

FIG. 1 is a block diagram of an arrhythmia control

system in which the present invention may be used; FIG. 2 is a block diagram of a pacemaker utilized in FIG. 1;

FIG. 3 is a block diagram of a microprocessor utilized in FIG. 1; and

FIG. 4 is a logic flow diagram of software executed by the microprocessor of FIG. 3 in accordance with the present invention.

#### BEST MODE FOR CARRYING OUT THE INVENTION

As used herein, the term "antitachycardia pacing" includes any pacing used for the reversion of tachycardia. The term "tachycardia" refers to any fast abnormal rhythm of the heart which may be amenable to treatment by electrical discharges, and specifically includes ventricular tachycardia (VT), supraventricular tachycardia (SVT), ventricular flutter and/or ventricular fibrillation (VF).

The term "therapy" as used herein includes the process-used between the detection and reversion of a tachyarrhythmia and includes the actions of antitachycardia pacing, cardioversion shock and defibrillation shock. The term "cardioversion" refers to the discharge of electrical energy into cardiac tissue in an attempt to terminate or revert a tachyarrhythmia. This may take the form of a high energy discharge (up to 40 Joules or more) or a low energy discharge (less than 1 Joule). Cardioversion shocks may or may not be synchronized to the rhythm of the heart. Defibrillation is a particular example of cardioversion.

This invention applies equally to devices which deliver energy synchronized to an R-wave and to those that do not, and applies to devices which use lower energy pulses (up to 1 Joule) as well as to devices which use higher energy pulses (up to 40 Joules or more). The invention applies to devices which deliver cardioverting shocks alone, as well as to devices which deliver antitachycardia pacing pulses alone or in a combination with cardioverting shocks. The invention will usually apply to ventricular implantable cardioverters, but is equally applicable to atrial cardioverters or multiple chamber cardioverters or defibrillators. The invention applies also to the delivery of any antitachycardia pacing pulse and post-reversion pacing therapy.

Referring to FIG. 1, there is depicted a block diagram of an arrhythmia control system 10. System 10 is designed to be implantable and includes a pulse module 11 and appropriate leads. More particularly, system 10 will generally include: a cardiac lead 12 connected to the patient's heart 14; a pacemaker 15 for the detection of analog signals representing cardiac electrical activity and for the delivery of pacing pulses to the heart; a microprocessor 16 which, in response to various inputs received from the pacemaker 15 as well as from a defibrillator 17, performs various operations so as to generate different control and data outputs to both pacemaker 15 and defibrillator 17; and a power supply 18 for the provision of a reliable voltage level to pacemaker 15,

microprocessor 16 and defibrillator 17 by suitable electrical conductors (not shown). Defibrillator 17 produces a high voltage to charge its capacitors and then discharges them in response to control signals from microprocessor 16. A defibrillator electrode lead 19 transfers the energy of a defibrillator shock 20 from the implanted pulse module to the surface of the heart 14.

Microprocessor 16 is connected to an external memory 21 by an address and data bus 22. An end-of-life (EOL) signal line 24 is used to provide, to microprocessor 16, a logic signal indicative of the approach of battery failure in power supply 18.

As more fully described below, microprocessor 16 and pacemaker 15 are connected by a communication bus 25, a sense line 26, a pace control line 27, a sensitivity control bus 28, and a pacing rate control bus 29. As also more fully described below, microprocessor 16 is connected to defibrillator 17 by a charge voltage level line 30, a charge control bus 31, a shock control bus 32, and a dump control bus 34.

Referring to FIG. 2, pacemaker 15 comprises pacing circuit 35 which includes a pacing pulse generator 36, sensing circuit 37, and telemetry circuit 38. In addition, there is a control block 39 which includes an interface to microprocessor 16.

In operation, sensing circuit 37 detects analog signals 45 from the heart 14 and converts the detected signals to digital signals. In addition, sensing circuit 37 receives an input sense control signal (which determines the sensitivity of the detection circuits in sensing circuit 37) by way of a sense control bus 41 from control block 39. A change in this sensitivity will affect the voltage deviation required at the sensing electrode for a sense to be registered in sensing circuit 37. The operation of the logic which changes the sensitivity is described in more detail in the aforementioned U.S. Patent No. 4,940,054.

Pacing circuit 35 also receives inputs from control block 39, including a pace control and a pacing rate control by way of pacing control bus 42 which carries the signals on pace control line 27 and pacing rate control bus 29. The pace control determines the type of pacing to occur and the bradycardia standby rate is established by the pacing rate control. Pacing circuit 35 causes pulse generator 36 to generate pacing pulses 44 which are delivered to the patient's heart 14 by means of cardiac lead 12.

Telemetry circuit 38 provides a bi-directional link between control block 39 of pacemaker 15 and an external device such as an external programmer (not shown). It allows data such as the operating parameters to be read from or altered in the implanted pulse module 11 (FIG. 1).

Referring to FIG. 3, microprocessor 16 comprises two 16-bit timers 47 and 48, a CPU 49, a vectored interrupt block 50, a RAM 54, a ROM 55, a ports interface 57 and an internal communication bus 58. RAM 54 acts as a scratch pad memory during execution of the various programs stored in ROM 55 and used by microproces-

in that said at least one other post-reversion standby rate value is set for a predetermined post-reversion period of time and in that said at least one other standby rate value is higher than said normal pacing rate value, to compensate for hemodynamic compromise experienced during tachycardia and/or following antitachycardia therapy.

2. Apparatus according to claim 1, wherein said antitachycardia therapy means includes at least one means from the group of means comprising an antitachycardia pacing pulse generator means, a cardioversion means, and a defibrillator means (17).
3. Apparatus of claim 1, further comprising tachycardia confirmation means for confirming the presence of a detected tachycardia subsequent to the detection thereof, said antitachycardia therapy means being activated only after said tachycardia is confirmed by said tachycardia confirmation means.
4. Apparatus according to claim 1, further comprising determining means for determining whether said tachycardia has been reverted, said determining means causing said antitachycardia therapy means to terminate said antitachycardia therapy when said tachycardia has been reverted.
5. Apparatus according to claim 1, wherein said antitachycardia therapy comprises a selected therapy from the group of therapies including antitachycardia pacing therapy, cardioversion therapy and defibrillation therapy, wherein said at least one other rate value comprise two values, wherein one of said two values is set by said bradycardia pacing rate setting means following antitachycardia pacing therapy, and wherein the other of said two values is set by said bradycardia pacing rate setting means following defibrillation or cardioversion therapy.
6. Apparatus according to claim 1, further comprising delay means for delaying delivery of said bradycardia pacing after said antitachycardia therapy means delivers said antitachycardia therapy.
7. Apparatus according to claim 1, wherein said bradycardia pacing rate setting means sets at least one intermediate bradycardia standby pacing rate between said post-reversion pacing rate and said normal pacing rate, thereby achieving a gradual resumption of the normal pacing rate following reversion of said tachycardia.
8. Apparatus according to claim 1, further comprising first timing means for setting said period of time as a fixed time interval.
9. Apparatus according to claim 1, further comprising

second programming timing means (38) for programming said predetermined period of time.

10. Apparatus according to claim 8 or 9, wherein after said predetermined period of time said first or second timing means causes said bradycardia pacing rate setting means to again deliver said bradycardia pacing pulses at said normal standby pacing rate value.
11. Apparatus according to claim 8 or 9, wherein said antitachycardia therapy comprises a therapy selected from the group of therapies including antitachycardia pacing therapy, cardioversion therapy and defibrillation therapy, and wherein said first or second timing means comprises a plurality of timers, each of said timers being responsive to the delivery of one of said antitachycardia therapies by said antitachycardia therapy means, each of said timers causing the setting of said at least one other rate value to be for a period of time that is independent of the settings thereof caused by the others of said timers.
12. Apparatus according to claim 4, wherein said antitachycardia therapy means includes:
  - first therapy means for delivering antitachycardia pacing therapy to the heart; and
  - second therapy means for delivering cardioversion or defibrillation therapy to the heart if said determining means does not determine that tachycardia reversion has occurred within a predetermined time interval.
13. Apparatus according to claim 6, wherein said delay means delays said delivery of bradycardia pacing for a predetermined programmable time interval.
14. Apparatus according to claim 7, wherein the durations of each of the said intermediate bradycardia standby pacing rates may be set according to at least one programmable time delay.
15. Apparatus according to claim 7, wherein the durations of each of the said intermediate bradycardia standby pacing rates may be set according to at least one programmable number of bradycardia pacing pulses to be delivered at each of the corresponding ones of said intermediate pacing rates.
16. Apparatus according to claim 7, wherein the normal bradycardia standby pacing rate, rather than being immediately resumed upon expiration of said post-reversion period of time, is resumed following a further period of gradually decreasing pacing rates.
17. Apparatus according to claim 16, wherein said further period of gradually decreasing pacing rates is

set as a programmed time period.

18. Apparatus according to claim 16, wherein the said further period of gradually decreasing pacing rates is set as a programmable number of pacing pulses. 5
19. Apparatus according to claim 16, wherein said further period of gradually decreasing pacing rates is derived from a programmed decrement in the bradycardia standby pacing rate applied to successive pacing pulses. 10
20. Apparatus according to claim 16, wherein said further period of gradually decreasing pacing rates is derived from a programmed increment in the bradycardia standby pacing interval applied to successive pacing pulses. 15
21. Apparatus according to claim 1, wherein said at least one other standby rate value is programmed. 20

#### Patentansprüche

1. Vorrichtung (10) zur Behandlung von Arrhythmien des Herzens (14) eines Patienten, mit: 25  
  
einer Bradykardie-Impulstherapieeinrichtung (35, 36, 39) zur Zulieferung von Bradykardie-Schrittmacherimpulsen zum Herzen (14) mit einer programmierbaren Bereitschaftsrate; 30  
  
einer Ermittlungseinrichtung (37) zur Ermittlung des Vorliegens einer Tachykardie des Herzens (14); 35  
  
einer Antitachykardie-Behandlungseinrichtung, die auf die Ermittlungseinrichtung reagiert, um eine Antitachykardiebehandlung zur Umkehrung der Tachykardie dem Herzen zuzuführen; und 40  
  
einer Bradykardie-Schrittmacherraten-Einstelleinrichtung (16) zur Einstellung der Rate der Bradykardie-Schrittmacherimpulse auf einen normalen Schrittmacherratenwert und zur Einstellung der Bradykardie-Schrittmacherrate auf zumindest einen anderen Bereitschaftswert für die Bradykardie-Erregung nach Umkehrung einer Tachykardie, dadurch gekennzeichnet, daß zumindest ein anderer (nach der Umkehrung) Bereitschaftsratenwert für einen vorbestimmten (nach der Umkehrung) Zeitraum eingestellt wird, und daß der zumindest eine andere Bereitschaftsratenwert höher als der normale Erregungsratenwert ist, um den hämodynamischen Kompromiß zu kompensieren, der während einer Tachykardie und/oder nach der Antitachykardie-Behandlung auftritt. 45 50 55

2. Vorrichtung nach Anspruch 1, bei welcher die Antitachykardie-Behandlungseinrichtung zumindest eine Einrichtung aus der Gruppe von Einrichtungen aufweist, welche eine Antitachykardie-Schrittmacherimpuls-Generatoreinrichtung, eine Kardioversionseinrichtung, und eine Defibrillatoreinrichtung (17) umfaßt.
3. Vorrichtung nach Anspruch 1, bei welcher weiterhin eine Tachykardie-Bestätigungseinrichtung vorgesehen ist, um das Auftreten einer ermittelten Tachykardie nach deren Ermittlung zu bestätigen, wobei die Antitachykardie-Behandlungseinrichtung erst dann aktiviert wird, nachdem die Tachykardie durch die Tachykardie-Bestätigungseinrichtung bestätigt wurde.
4. Vorrichtung nach Anspruch 1, bei welcher weiterhin eine Ermittlungseinrichtung vorgesehen ist, um zu ermitteln, ob die Tachykardie umgekehrt wurde, und die Ermittlungseinrichtung die Antitachykardie-Behandlungseinrichtung dazu veranlaßt, die Antitachykardie-Behandlung zu beenden, wenn die Tachykardie umgekehrt wurde.
5. Vorrichtung nach Anspruch 1, bei welcher die Antitachykardie-Behandlung eine ausgewählte Behandlung aus der Gruppe von Behandlungen umfaßt, welche eine Antitachykardie-Schrittmacherbehandlung, eine Kardioversionsbehandlung und eine Defibrillationsbehandlung umfaßt, wobei der zumindest eine andere Ratenwert zwei Werte umfaßt, und einer der beiden Werte durch die Bradykardie-Schrittmacherraten-Einstelleinrichtung nach der Antitachykardie-Schrittmacherbehandlung eingestellt wird, und der andere der beiden Werte durch die Bradykardie-Schrittmacherraten-Einstelleinrichtung nach der Defibrillations- oder Kardioversionsbehandlung eingestellt wird.
6. Vorrichtung nach Anspruch 1, bei welcher weiterhin eine Verzögerungseinrichtung vorgesehen ist, um die Zulieferung der Bradykardie-Schrittmachererregung zu verzögern, nachdem die Antitachykardie-Behandlungseinrichtung die Antitachykardie-Behandlung zugeführt hat.
7. Vorrichtung nach Anspruch 1, bei welcher die Bradykardie-Schrittmacherraten-Einstellvorrichtung zumindest eine mittlere Bradykardie-Bereitschaftsratenwert zwischen der Schrittmacherrate nach der Umkehrung und der normalen Schrittmacherrate einstellt, wodurch eine allmähliche Wiederherstellung der normalen Schrittmacherrate nach der Umkehrung der Tachykardie erzielt wird.
8. Vorrichtung nach Anspruch 1, welche weiterhin eine erste Zeitgebereinrichtung zur Einstellung des Zeitraums als festes Zeitintervall aufweist.

9. Vorrichtung nach Anspruch 1, welche weiterhin eine zweite Programmierzeiteinrichtung (38) zum Programmieren des vorbestimmten Zeitraums aufweist.
10. Vorrichtung nach Anspruch 8 oder 9, bei welcher nach dem vorbestimmten Zeitraum die erste oder zweite Zeitgebereinrichtung die Bradykardie-Schrittmacherraten-Einstelleinrichtung dazu veranlaßt, erneut die Bradykardie-Schrittmacherimpulse mit dem normalen Bereitschaftsschrittmacherratenwert zuzuführen.
11. Vorrichtung nach Anspruch 8 oder 9, bei welcher die Antitachykardie-Behandlung eine Behandlung umfaßt, die aus der Gruppe von Behandlungen ausgewählt ist, welche eine Antitachykardie-Schrittmacherbehandlung, eine Kardioversionsbehandlung und eine Defibrillationsbehandlung umfaßt, und bei welcher die erste oder zweite Zeitgebereinrichtung mehrere Zeitgeber umfaßt, von denen jeder auf die Zulieferung einer der Antitachykardiebehandlungen durch die Antitachykardie-Behandlungseinrichtung reagiert, und jeder der Zeitgeber die Einstellung des zumindest einen anderen Ratenwerts für einen Zeitraum veranlaßt, der unabhängig von dessen Einstellungen ist, welche durch die anderen dieser Zeitgeber veranlaßt werden.
12. Vorrichtung nach Anspruch 4, bei welcher die Antitachykardie-Behandlungseinrichtung umfaßt:
- eine erste Behandlungseinrichtung zur Zulieferung einer Antitachykardie-Schrittmacherbehandlung zum Herzen; und
- eine zweite Behandlungseinrichtung zur Zulieferung einer Kardioversionsbehandlung oder einer Defibrillationsbehandlung zum Herzen, falls die Ermittlungseinrichtung nicht feststellt, daß eine Tachykardieumkehrung innerhalb eines vorbestimmten Zeitintervalls aufgetreten ist.
13. Vorrichtung nach Anspruch 6, bei welcher die Verzögerungseinrichtung die Zulieferung der Bradykardie-Schrittmachererregung für ein vorbestimmtes, programmierbares Zeitintervall verzögert.
14. Vorrichtung nach Anspruch 7, bei welcher die Dauern jeder der Zwischenwerte der Bradykardie-Bereitschaftsschrittmacherraten entsprechend zumindest einer programmierbaren Zeitverzögerung eingestellt werden können.
15. Vorrichtung nach Anspruch 7, bei welcher die Dauern jeder der Zwischenwerte der Bradykardie-Bereitschaftsschrittmacherraten entsprechend
- zumindest einer programmierbaren Anzahl von Bradykardie-Schrittmacherimpulsen eingestellt werden können, welche bei jeder der entsprechenden Zwischenwerte der Schrittmacherraten zugeführt werden sollen.
16. Vorrichtung nach Anspruch 7, bei welcher die normale Bradykardie-Bereitschafts-Schrittmacherrate, anstatt unmittelbar nach Anlauf des Zeitraums nach der Umkehrung wieder aufgenommen zu werden, nach einem weiteren Zeitraum allmählich abnehmender Schrittmacherraten wieder aufgenommen wird.
17. Vorrichtung nach Anspruch 16, bei welcher der weitere Zeitraum allmählich abnehmender Schrittmacherraten als ein programmierter Zeitraum eingestellt wird.
18. Vorrichtung nach Anspruch 16, bei welcher der weitere Zeitraum allmählich abnehmender Schrittmacherraten als eine programmierbare Anzahl von Schrittmacherimpulsen eingestellt wird.
19. Vorrichtung nach Anspruch 16, bei welcher der weitere Zeitraum allmählich abnehmender Schrittmacherraten von einer programmierten Abnahme der Bradykardie-Bereitschafts-Schrittmacherrate abgeleitet wird, die auf aufeinanderfolgende Schrittmacherimpulse ausgeübt wird.
20. Vorrichtung nach Anspruch 16, bei welcher der weitere Zeitraum allmählich abnehmender Schrittmacherraten von einer programmierten Erhöhung des Bradykardie-Bereitschafts-Schrittmacherintervalls abgeleitet wird, welches auf aufeinanderfolgende Schrittmacherimpulse ausgeübt wird.
21. Vorrichtung nach Anspruch 1, bei welcher der zumindest eine andere Bereitschaftsratenwert programmiert ist.

#### Revendications

1. Appareil (10) pour le traitement d'arythmies cardiaques d'un coeur (14) d'un patient, comprenant:
- un moyen de thérapie à impulsions de bradycardie (35, 36, 39) pour délivrer au coeur (14) des impulsions de stimulation de bradycardie à un rythme d'attente programmable;
- un moyen de détection (37) pour détecter la présence d'une tachycardie du coeur (14);
- un moyen de thérapie antitachycardie réagissant au dit moyen de détection pour la délivrance au coeur de la thérapie antitachycardie en vue de la réversion de ladite tachycardie; et
- un moyen d'établissement de rythme de stimulation de bradycardie (16) pour établir le rythme

désdites impulsions de stimulation de bradycardie à une valeur de rythme de stimulation normale et pour établir ledit rythme de stimulation de bradycardie à au moins une autre valeur de rythme d'attente pour stimuler une bradycardie après une réversion d'une tachycardie,

caractérisé en ce que ladite au moins une autre valeur de rythme d'attente de post-réversion est établie pendant une période temporelle de post-réversion prédéterminée et en ce que ladite au moins une autre valeur de rythme d'attente est supérieure à ladite valeur de rythme de stimulation normale pour compenser un compromis hémodynamique subi pendant une tachycardie et/ou suite à une thérapie antitachycardie.

2. Appareil selon la revendication 1, dans lequel ledit moyen de thérapie antitachycardie englobe au moins un moyen choisi dans le groupe de moyens comprenant un moyen générateur d'impulsions de stimulation antitachycardie, un moyen de cardioversion et un moyen de défibrillateur (17).
3. Appareil selon la revendication 1, comprenant en outre un moyen de confirmation de tachycardie pour confirmer la présence d'une tachycardie détectée, après la détection de celle-ci, ledit moyen de thérapie antitachycardie étant uniquement activé après la confirmation de ladite tachycardie par ledit moyen de confirmation de tachycardie.
4. Appareil selon la revendication 1, comprenant en outre un moyen de détermination pour déterminer s'il y a eu réversion de ladite tachycardie, ledit moyen de détermination forçant ledit moyen de thérapie antitachycardie à achever ladite thérapie antitachycardie après la réversion de ladite tachycardie.
5. Appareil selon la revendication 1, dans lequel ladite thérapie antitachycardie comprend une thérapie choisie dans le groupe de thérapies englobant la thérapie de stimulation antitachycardie, la thérapie de cardioversion et la thérapie de défibrillation, dans lequel ladite au moins une autre valeur de rythme comprend deux valeurs, une des dites deux valeurs étant établie par ledit moyen d'établissement de rythme de stimulation de bradycardie après une thérapie de stimulation antitachycardie, l'autre des dites deux valeurs étant établie par ledit moyen d'établissement de rythme de stimulation de bradycardie après une thérapie de défibrillation ou de cardioversion.
6. Appareil selon la revendication 1, comprenant en outre un moyen de retard pour retarder la délivrance de ladite stimulation de bradycardie après la

délivrance de ladite thérapie antitachycardie par ledit moyen de thérapie antitachycardie.

7. Appareil selon la revendication 1, dans lequel ledit moyen d'établissement de rythme de stimulation de bradycardie établit au moins un rythme de stimulation d'attente de bradycardie intermédiaire entre ledit rythme de stimulation de post-réversion et ledit rythme de stimulation normal, entraînant ainsi une reprise progressive du rythme de stimulation normal après la réversion de ladite tachycardie.
8. Appareil selon la revendication 1, comprenant en outre un premier moyen de cadencement pour établir ladite période temporelle sous forme d'un intervalle de temps fixe.
9. Appareil selon la revendication 1, comprenant en outre un second moyen de cadencement de programmation (38) pour programmer ladite période temporelle prédéterminée.
10. Appareil selon la revendication 8 ou 9, dans lequel, après ladite période temporelle prédéterminée, ledit premier ou second moyen de cadencement force ledit moyen d'établissement de rythme de stimulation de bradycardie à délivrer à nouveau lesdites impulsions de stimulation de bradycardie à ladite valeur de rythme de stimulation d'attente normale.
11. Appareil selon la revendication 8 ou 9, dans lequel ladite thérapie antitachycardie comprend une thérapie choisie dans le groupe de thérapies englobant la thérapie de stimulation antitachycardie, la thérapie de cardioversion et la thérapie de défibrillation, et dans lequel ledit premier ou second moyen de cadencement comprend plusieurs minuteriers, chacune des dites minuteriers réagissant à la délivrance de l'une des dites thérapies antitachycardie par le dit moyen de thérapie antitachycardie, chacune des dites minuteriers entraînant l'établissement d'au moins une autre valeur de rythme pour une période temporelle indépendante des établissements correspondants entraînés par les autres des dites minuteriers.
12. Appareil selon la revendication 4, dans lequel ledit moyen de thérapie antitachycardie englobe:
  - un premier moyen de thérapie pour délivrer au coeur une thérapie de stimulation antitachycardie; et
  - un second moyen de thérapie pour délivrer au coeur une thérapie de cardioversion ou de défibrillation, dans la mesure où ledit moyen de détermination indique qu'il n'y a pas eu réversion de la tachycardie dans le cadre d'un intervalle de temps prédéterminé.

13. Appareil selon la revendication 6, dans lequel ledit moyen de retard retarde la délivrance de la stimulation de la bradycardie pendant un intervalle de temps programmable, prédéterminé.
14. Appareil selon la revendication 7, dans lequel les durées d'application de chacun des dits rythmes de stimulation d'attente de bradycardie intermédiaires peuvent être établies en fonction d'au moins un temps de retard programmable.
15. Appareil selon la revendication 7, dans lequel les durées de chacun des dits rythmes de stimulation d'attente de bradycardie intermédiaires peuvent être établies en fonction d'au moins un nombre programmable d'impulsions de stimulation de bradycardie devant être délivrées pour chacun des dits rythmes de stimulation intermédiaires correspondants.
16. Appareil selon la revendication 7, dans lequel le rythme de stimulation d'attente normal de bradycardie n'est pas repris immédiatement lors de l'expiration de ladite période temporelle de post-réversion, mais après une période supplémentaire de réduction progressive des rythmes de stimulation.
17. Appareil selon la revendication 16, dans lequel ladite période supplémentaire de réduction progressive des rythmes de stimulation est établie sous forme d'une période temporelle programmée.
18. Appareil selon la revendication 16, dans lequel ladite période supplémentaire de réduction progressive des rythmes de stimulation est établie sous forme d'un nombre programmable des impulsions de stimulation.
19. Appareil selon la revendication 16, dans lequel ladite période supplémentaire de réduction progressive des rythmes de stimulation est dérivée d'une décrémentation programmée du rythme de stimulation d'attente de bradycardie appliqué à des impulsions de stimulation successives.
20. Appareil selon la revendication 16, dans lequel ladite période supplémentaire de réduction progressive des rythmes de stimulation est dérivée d'une incrémentation programmée de l'intervalle de stimulation d'attente de bradycardie appliqué à des impulsions de stimulation successives.
21. Appareil selon la revendication 1, dans lequel ladite au moins une autre valeur de rythme d'attente est programmée.



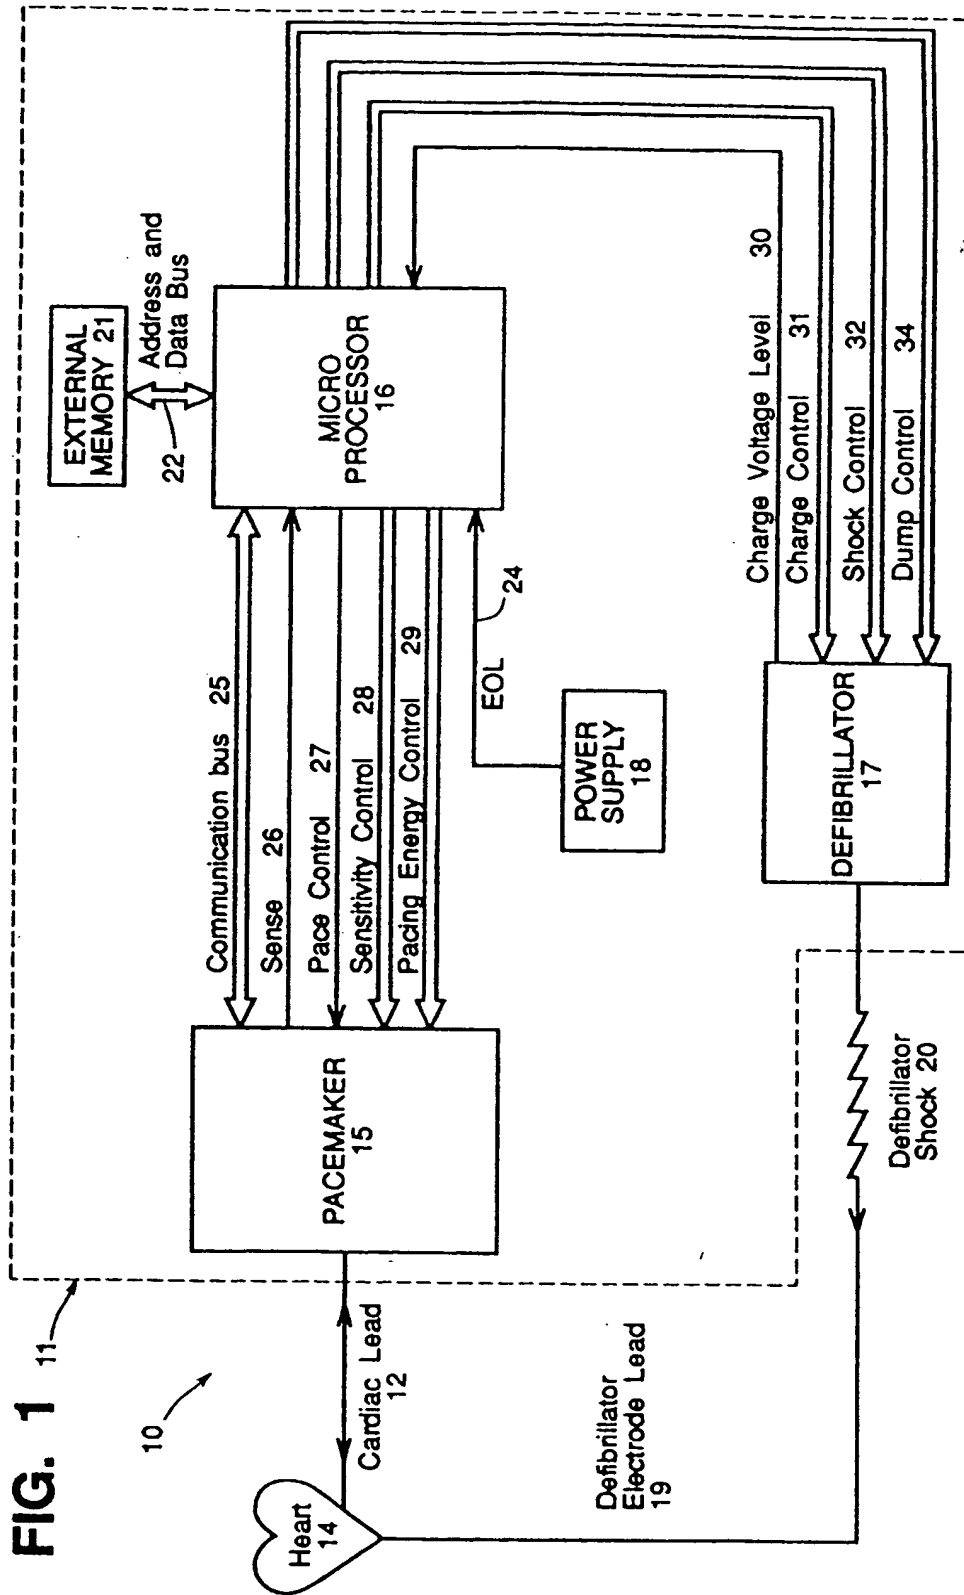


FIG. 2


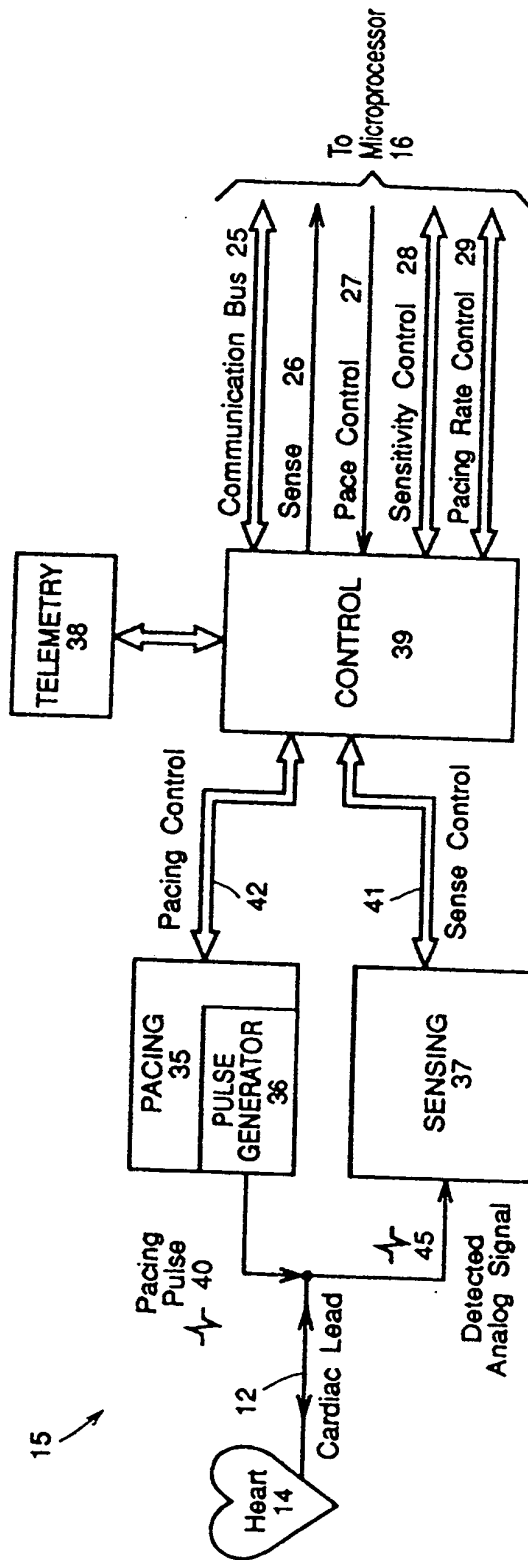


FIG. 4

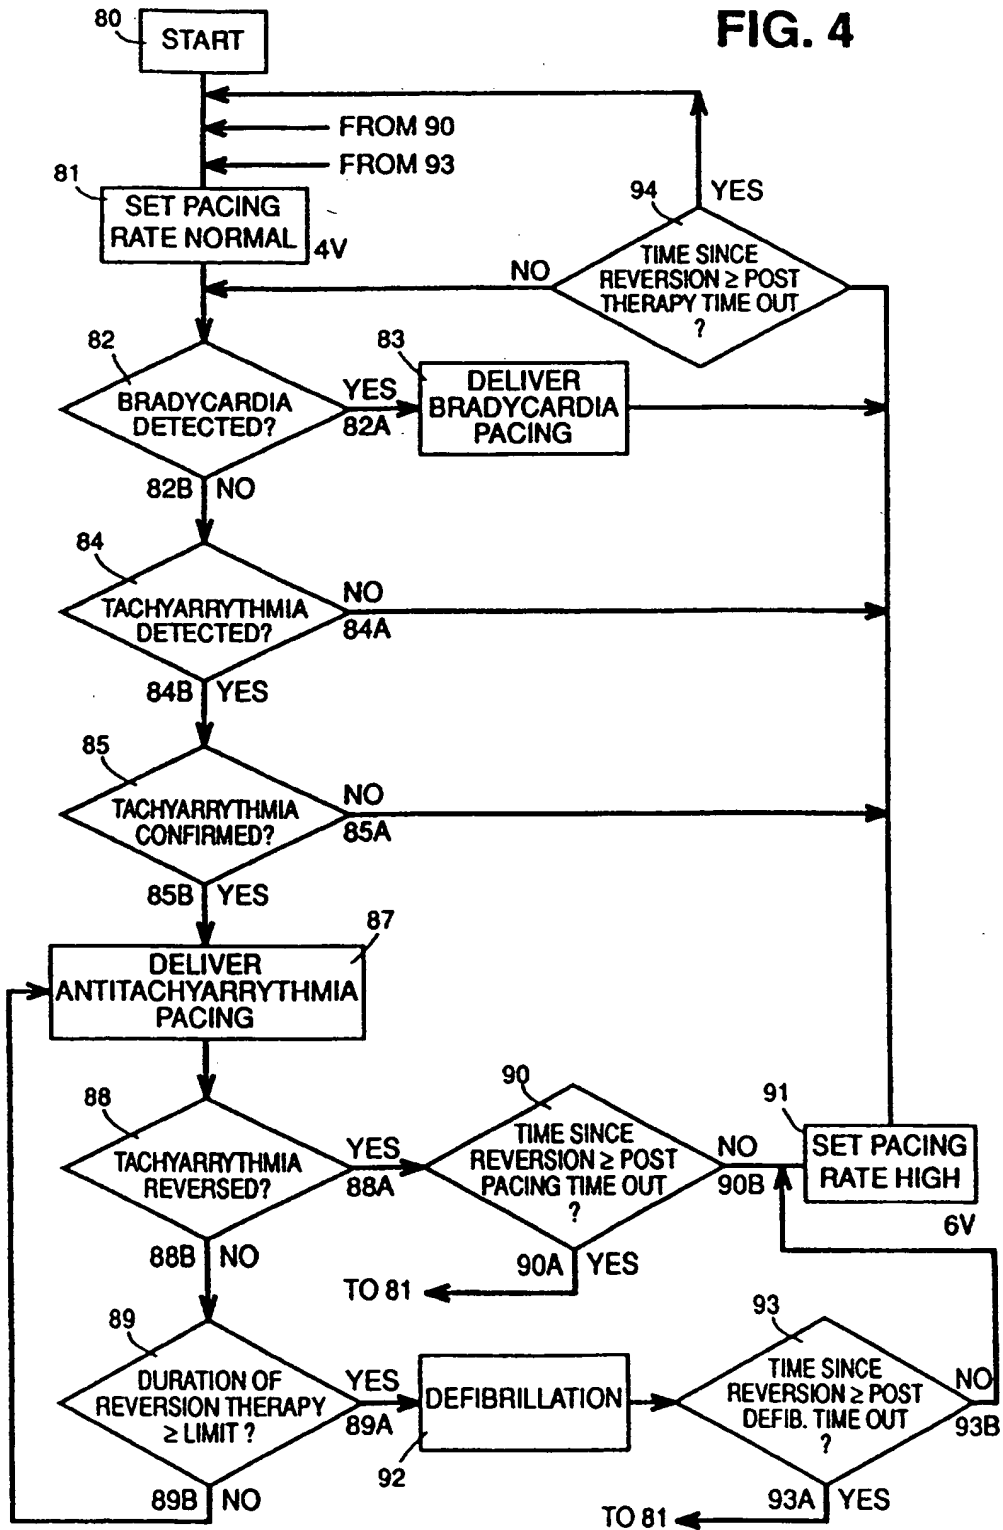

**THIS PAGE BLANK (USPTO)**